



SVEZA DRAWER

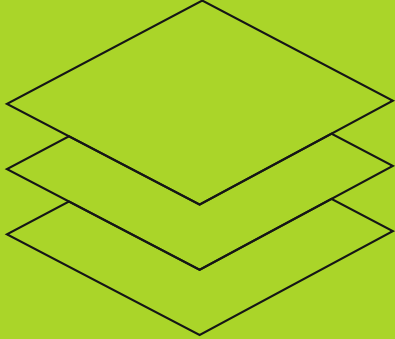

100% BIRCH
PLYWOOD READY
FOR MAKING
FURNITURE
COMPONENTS

READY FOR CUTTING AND MILLING

FACE VENEER
0.7 MM



VERY
STRONG
GLUE BOND



COMPLIANCE




CARB


M1




OVAL
PATCH




ALL SHEETS
IN ONE DIRECTION



BEST
SIDE UP



THICKNESS
TOLERANCES
 ± 0.3 mm



 **SVEZA**

SVEZA.COM

SVEZA DRAWER

SVEZA DRAWER IS SPECIALLY DESIGNED FOR MAKING DRAWER SIDES AND FURNITURE COMPONENTS WHERE THE PRODUCTION PROCESS INVOLVES CUTTING, MILLING, AND MACHINING OF PLANES AND EDGES. EXTRA CONTROL OF BONDING STRENGTH PROVIDES FOR AN IDEAL DOVETAIL JOINT. THICKER FACE VENEERS ARE PERFECT FOR EXTRA SANDING AND PAINTING.

KEY BENEFITS



100% birch veneers



Exceptional bonding strength



Tight thickness tolerances

Face veneer ≥ 0.7 mm



All sheets in one direction, best side up



Oval patch

TECHNICAL SPECIFICATIONS

Panel sizes, LxW, mm [ft]	1525x1525 [5x5] 1220x1525 [4x5]/1250x1525 [4x5] 1525x1220 [5x4]/1525x1250 [5x4]
Thickness, mm	5-15 [other thicknesses on request]
Grade	DR B/B, DR B/BB, DR BB/BB, DR B/CP, DR BB/CP, DR CP/CP
Glue	MR [Interior]
Formaldehyde emission class	E1, E0.5, E0.05ppm, CARB
Density, kg/m ³	640-700
Moisture, %	≤ 10

Manufactured to STO SVEZA Drawer Birch Plywood.

THICKNESS TOLERANCES

Panel thickness, mm	Tolerance, mm
3-5	± 0.2
6-15	± 0.3
18-30	± 0.5

SIZE TOLERANCES

Panel length/width, mm	Tolerance, mm
1220/1250	± 3.0
1500/1525	± 4.0

SVEZA Drawer can be made to the customer's specifications for thickness, number of plies, and tolerances.

COMPLIANCE



CARB



SVEZA